
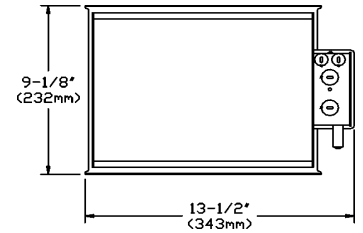


3 3/4" (95mm) aperture
Line Voltage 120V ES/ESD16
IC Frame-In-Kit

Lytecaster
Recessed Downlight

302ESICX

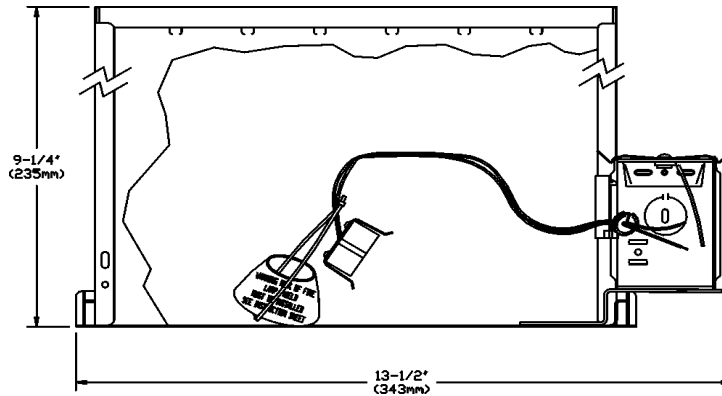

Complete fixture consists of Reflector Trim & Frame-in Kit. Select each separately

POWER PACK	CUT-OUT	REFLECTOR TRIM
302ESICX	3 3/4" (95mm)	Accepts most 3 3/4" (95mm) 300 serie trims ; see Reflector Trim specification sheets.

Features

Mounting Frame : 20ga. galvanized steel. Four slots are positioned 90° apart to simplify alignment.

Insulated Ceiling Housing : 26ga. galvanized steel. CSA certified and UL listed for direct contact with thermal insulation.

Internal thermal cut-out : insures against overheating due to incorrect lamping.

Mounting Bars: (4) 18 ga. galvanized steel. 13" (330mm) long bars extend to 27" (686mm), rotatable and lockable, integral T-bar tabs. Spike detail eliminates the need of additional nailing.

Mounting Bars Locking Clip : (1) locks mounting bars in place.

Socket : Porcelain body ; Twist and lock (GZ base) Pre-wired with 18 ga. Teflon 250° leads to junction box.

Junction Box : 4"(102mm) x 3"(76mm) x 2"(51mm) 18 ga. galvanized steel . CSA/UL certified for maximum of 8 No. 12 ga. 90° C through branch circuit conductors. Integral cable clamp permit attachment of non metallic Loomex without need of additional connectors. Pry-out knock-outs accept BX cable. Easy access from both sides with snap-on covers.

Accessories

Mounting Bars Extenders : 1964
20" (508mm) long. Set of 2

Mounting Bar Locking Clips : 0098
To lock mounting bars in place after installation. Set of 12.

Vapor Barrier Extender : VBE300
Polyvinyl Air Vapour Barrier ; to comply with provincial legislation. For all non Air-Seal frame-In-Kits.

Labels : CSA , UL

Damp or Wet location rated depending on trim used.